


Spax® Panhead

mit Pozidriv-Kreuzschlitz Z / I-Stern
und Wellenschliff
Stahl gehärtet, verzinkt,
kunststoffgesintert

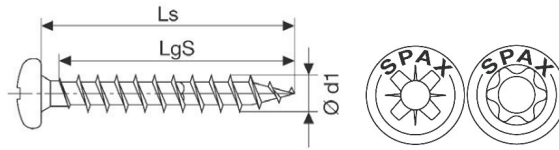

d ₁ Nennmaß	3	3,5	4	4,5	5	6
d _k Nennmaß	6	7	8	9	9,9	11,9
k maximal	2,3	2,5	2,9	3,1	3,4	4
Kreuzschlitz	Z 1	Z 2	Z 2	Z 2	Z 2	Z 3
l						
10	1,80					
12	1,80	2,25	2,85	3,80		
16	1,90	2,25	2,70	3,80	5,45	
20	2,05	2,55	2,95	4,10	5,45	10,65
25	2,25	2,75	3,40	4,45	5,60	10,65
30	2,95	3,00	3,55	4,95	6,10	11,70
35		3,80	4,10	5,35	7,05	11,70
40		4,25	4,95	6,00	7,60	11,70
45			5,55	7,60	8,55	12,40
50			6,05	7,90	9,05	13,00
60			10,25	9,95	11,05	16,10
70					15,45	19,15
80					18,55	21,05
90					23,50	24,10
100						28,50
Paketinhalt	1000	1000	1000 >35: 500	1000 >25: 500	1000 >20: 500 >40: 200	500 >40: 100 >30: 100